

FEATURES

- Dissolved Oxygen probe based on fluorescence quenching principle measurement
- Optical technology: low maintenance and high efficiency
- PT100 Temperature compensation
- No flow needed - measurement possible in still water
- Response time: T_{90} : 60 sec. approx.

Dissolved Oxygen measurement is based on optical measurement (fluorescence) of the oxygen concentration.

How does it work?

A chemical film is glued to the tip of an optical cable and the fluorescence properties of this film depend on the oxygen concentration. Fluorescence is at a maximum when there is no oxygen present. When an O₂ molecule comes along it collides with the film and this quenches the photoluminescence. In a given oxygen concentration there will be a specific number of O₂ molecules colliding with the film at any given time, and the fluorescence properties will be stable.

The signal (fluorescence) to oxygen ratio is not linear, and an optode is most sensitive at low oxygen concentration. That is, the sensitivity decreases as oxygen concentration increases.


The optode sensors can, however, work in the whole region 0% to 100% oxygen saturation in water. No oxygen is consumed and hence the sensor is insensitive to stirring, but the signal will stabilize more quickly if the sensor is stirred after being put in the sample. These type of electrode sensors can be used for on-site and realtime monitoring of Oxygen production in water splitting reactions.

EOLUM

Working range:	0 ÷ 20 mg/l O ₂ (0 ÷ 20ppm)	Resolution: ± 0.01
Analysis system:	fluorescence	
Temperature working range:	-5 / +50° C (23/122°F)	
Maximum pressure:	10 bar (145 PSI)	
Installation Diameter:	G1	
Connector cable:	G1	
Cable length	15 mt	
Materials:	sensor shaft: POM sensor cap: Stainless Steel fluorescence layer: Silicone	
Probe holder:	NPED-E; PEL-E; PEC-E	



DIMENSION

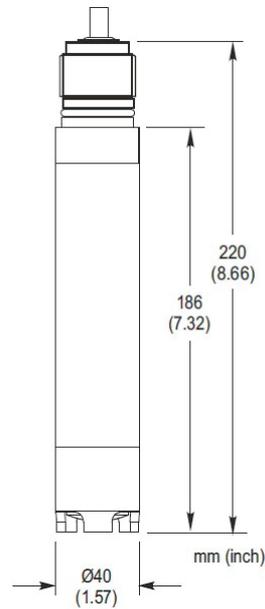

ASSEMBLIES

- NPED-E - off-line probe holder
For EOLUM or ETORBH electrodes. Max 50° C, 5bar. Fittings 6x8.
- PEL-E - PVC in-line probe holder for "T" connection (PN 16 Ø63).
For EOLUM or ETORBH electrodes. Max 40°C, 7 bar.
- PEC-E - PP Immersion probe holder
For EOLUM or ETORBH electrodes. Max 80°C. Length 100 cm.

EOLUM COMPLETES "MAX 5" and "LDSO" MEASURING SYSTEM