

Model ETX Universal Transmitter



Measures Chlorine, pH, ORP, Specific Ion, Dissolved Oxygen, Turbidity, Conductivity or Resistivity with
Model S80 Intelligent Sensors



Model ETX Universal Transmitter

The RealTech Controls **6** Point Advantage

- 1 Universal Transmitter:** Single or dual channel, measures Chlorine, pH, ORP, DO, Specific Ion, Turbidity, Conductivity or Resistivity
- 2 Graphic LCD Display:** Easy to read graphical and numerical Information
- 3 Simple Menu Structure:** Intuitive, easy to navigate and configure
- 4 Use with S80 Digital Intelligent Sensors** that are factory calibrated sensors and store data
- 5 4-20 mA output with MODBUS RTU and Alarm Relays:** Flexible configurations for all applications
- 6 HART® communication**

Description

The RealTech Controls Model ETX Universal Transmitter is a single or dual channel transmitter designed for the continuous measurement of Chlorine, pH, ORP, pION, Dissolved Oxygen, Turbidity, Conductivity or Resistivity for industrial applications. The Model ETX transmitter digitally communicates with any Model S80 Intelligent Sensor, automatically configuring the transmitter's menus and display screens to the measured parameter. The same transmitter can be used for any measurement parameter, so if you connect a S80 Chlorine Sensor into a previous pH transmitter, it will automatically reconfigure into a Chlorine transmitter. There is no longer any need to inventory multiple instrument types.

SENSORS

The Model S80 Intelligent Sensors facilitate two-way communication with the model ETX transmitters. The type of sensor, identity and serial number are stored in the sensor's memory along with calibration registers. The Model S80 sensors are calibrated at the factory so they are ready to use when connected to the ETX transmitter. The Model S80 sensors are waterproof and submersible with all internal components epoxy encapsulated inside the ¾" O.D. housing. The S80 sensors use the same field proven, easily replaceable electrodes as the Model S10 and S17 sensors saving time and money. A digital converter option is available for the Model ETX transmitter to allow the use of non-digital sensors.

DISPLAY

The Model ETX Transmitter features a large easily viewed LCD display. Loop powered instruments have Black lettering on a Grey background, while 100-240 VAC and 24 VDC powered instruments have Blue lettering on a White background when the LED backlight is on. The Model ETX display is easily switched between the single and dual channel display modes. It has three



Model ETX Universal Transmitter

main display screens; the Data Screen, the Millivolt Screen and the Graphical Display screen. The Data Screen displays the measurement type, the measured value with units, the % milliamp output of the 4-20 mA channel and the temperature. The mV Screen displays the measurement type, the raw millivolt signal from the sensor, the % milliamp output of the 4-20 mA channel and the temperature. The Graphical Screens display the measurement type, the measured value with units and a graphical representation of the % milliamp output. Three graphical styles are available; a Trend line, a Bar graph or a Gauge. The status of alarm relays, energized/de-energized is displayed on transmitters with relays.

MENUS

Menu navigation is accomplished using membrane switch buttons located on the sides of the display, and are associated with each displayed function. Pressing any of the buttons twice within 2 seconds activates the main menus. The primary selections are the Calibration menu, Configuration menu, Info Screens and Simulate menu.

CALIBRATION

Model S80 sensors come pre-calibrated from the factory. Field calibrations are easily performed with the Model ETX. The Calibration menu includes the Auto Cal function, a two-point calibration, the Standardize function, a single point calibration or the Manual Calibration, where previously determined Offset and Slope values are entered manually into the Model ETX transmitter.

CONFIGURATION

The Configuration menus allow the Model ETX transmitter's Display and Output functions and the Model S80 sensor's characteristics to be configured or adjusted. Display screens include the Hold function, Graphical Display Style, Back Light and Contrast adjustments, Labels/Tags for naming the transmitter, Password Protection and a Factory Default reset. Output screens include setting the addresses for MODBUS or HART® outputs, setting the 4-20 mA Range and fault settings and configuring the Alarm Relays.

INFO


The Info screens provide transmitter and Sensor Information. The transmitter screens display the Name, Power, Serial#, Firmware version and the output configuration. The sensor screens display the Name, Part #, Serial # and stored Calibration data.

SIMULATE

The Simulate Menu allows the input and output signals to be simulated. The outputs are easily tested by entering a 4-20 mA output value or energizing and de-energizing a relay. The Ramp function cycles the signal across the configured 4-20 mA range, so the transmitter can generate a signal from 0 pH to 14 pH and back to 0 pH activating relays and generating a 4-20 mA output. The cycle time and the duration are adjustable allowing sufficient time for an individual to walk to the control room to verify the output.

POWER SUPPLY and OUTPUTS

The Model ETX transmitter is available as a loop powered (single channel only), a 24 VDC or a 100/240 VAC powered transmitter. The loop powered version is available with an optional HART® output. The line powered instruments have one 4-20 mA output per channel and MODBUS RTU. Available options include HART® comm and Alarm Relay package. The relays can be configured as Alarm (set point) relays, timer activated relays, or Fault relays.

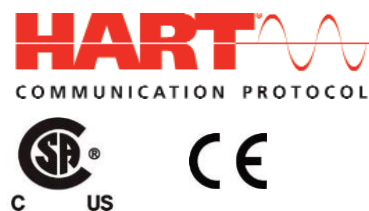

Specifications

Input Specification

Digital protocol, all ECD S80 sensors,
Liquid, Gas, Process sensors (Optional
analog to digital input board for mV
sensors)

Input Ranges

pH -1.00 – 15.00 pH
ORP -1500 - +1500 mV
pION 000.1 – 999.9, Auto
Ranging: ppb ↔ ppm
↔pp thousand
Dissolved Oxygen: 000.1 – 999.9 Auto
Ranging: ppb, ppm,
%SAT, mg/L
Conductivity 0.055 μS – 2.00S Auto
Ranging: μS, mS, S
Resistivity 0.001 - 20.00 meg-ohms
Turbidity 000.0 - 4000NTU
Auto-Ranging: NTU,
FNU, mg/L, ppm,
% Solids
Temperature -30°C - 140°C

Accuracy

pH 0.02 pH
ORP ± 1 mV
pION Specific for ion type
Dissolved Oxygen 2% of calibrated range
Conductivity 2% of calibrated
rangeResistivity 2% of calibrated range
Turbidity 4% of calibrated range
Temperature ± 0.3°C

Enclosure

Polycarbonate, NEMA 4X, weatherproof, ½
DIN, (L xWx D) 5.7" X 5.7" X 3.5" (14.4cm X
14.4cm X 9.0cm)

Environmental Conditions

Ambient Temperature -20°C - 70°C
Storage Temperature -30°C - 85°C
Relative Humidity 0 – 90% NC

Display

128 x 64 pixels (2.75" x 1.5") LCD,
Black/Grey background on loop powered
instruments, Blue/White background
LED backlight on 100-240Vac and 24Vdc
powered instruments

Input Power


Code -0: Loop powered, 24 VDC, 600 Ω
maximum load (18-36VDC @
35 mW minimum)
Code -1: 24 VDC (18-36 VDC @
250 mW minimum)
Code -2: 100-240 VAC, 50/60 Hz, 4W

Outputs

4-20 mA output (standard), Fault
Condition: 3.5 mA, 22 mA or none
Modbus RTU (standard)
HART® (optional)
Alarm Relays (Optional) Three (3) SPDT,
form 1C, 250 VAC, 3 Amp resistive
maximum relays, user configurable as
Hi/Lo or Fault alarms

Shipping

Size: 8" x 8" x 5" (20.5 x 20.5 x 12.7 cm)
Weight: 1.6 lbs. (0.75 kg)

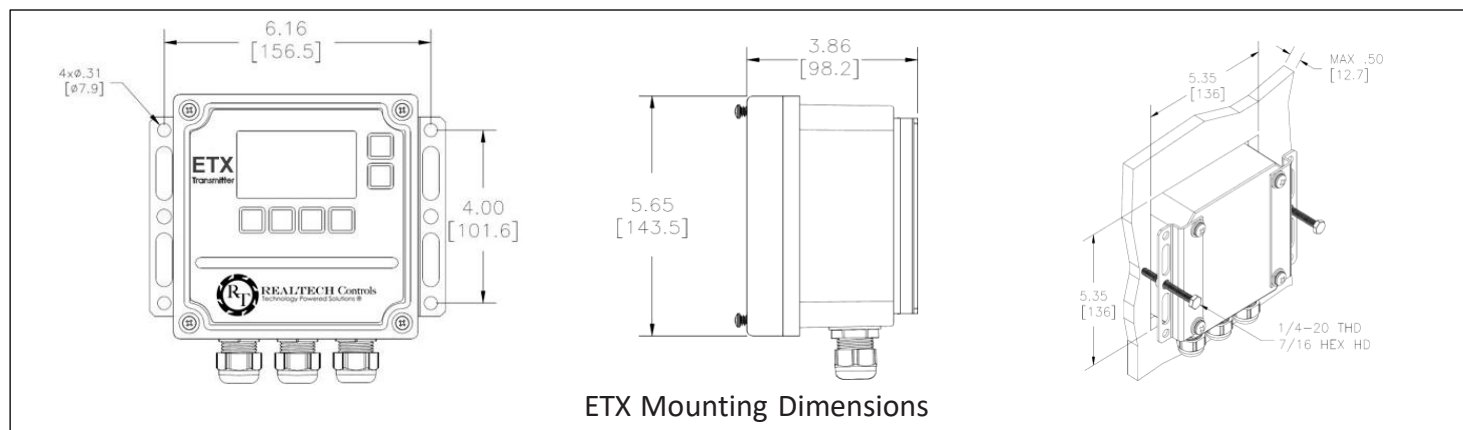

ETX Mounting Dimensions

| Model ETX- Transmitter Part Number Guide | | | | | | |
|--|-------------|--|---|---|-------------------------------|-------------------------------|
| Ch 1 Inputs | 1 | S80 Sensor, Chlorine, pH, ORP, pION, Conductivity, Resistivity and galvanic Dissolved Oxygen, TRITON® DO82 Optical DO & TR86 Turbidity | | | | |
| | Ch 2 Inputs | 0 | No Input for Channel 2 | | | |
| | | 1 | S80 Sensor, Chlorine, pH, ORP, pION, Conductivity, Resistivity and galvanic Dissolved Oxygen, DO82 & TR86 Turbidity | | | |
| | | Power Supply | -0 | Loop Powered Transmitter (not available for DO82 or TR86 sensors) | | |
| | | | -1 | 24 VDC Powered Transmitter | | |
| | | | -2 | 100/240 VAC, 50/60Hz, 4W powered Transmitter | | |
| | | Alarm Relays | 0 | No Relays | | |
| | | | 1 | (3) form C 250 V 3A relays | | |
| | | | Output | 0 | 4-20 mA output and MODBUS RTU | |
| | | | | 1 | HART® | |
| | | | | 2 | 2 x 4-20 mA with MODBUS RTU | |
| | | Mounting Hardware | | | -00 | No Mounting Hardware |
| | | | | | -01 | Universal Mount |
| | | | | | -02 | Panel Mount |
| | | | | | -03 | Handrail Mount |
| | | | | | -04 | Sunshield Vertical Rail Mount |
| | | | | | -05 | Sunshield Horizontal Rail 1 |
| Model ETX- | 1 | 1 | -0 | 0 | 1 | -01 |

RealTech Controls

5444 Sepulveda Blvd, #216
Sherman Oaks, CA 91411 USA

Phone: +1 (818) 606-0562
email: sales@realtechcontrols.com
web: <https://realtechcontrols.com>

